



AMERICAN FLOOR PRODUCTS COMPANY, INC.


AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422

email: sales@afco-usa.com • Web Site: www.afco-usa.com

CUSTOMER P.O. #

NEWPORT FLOORING® Hidden Interlock (WP-265)

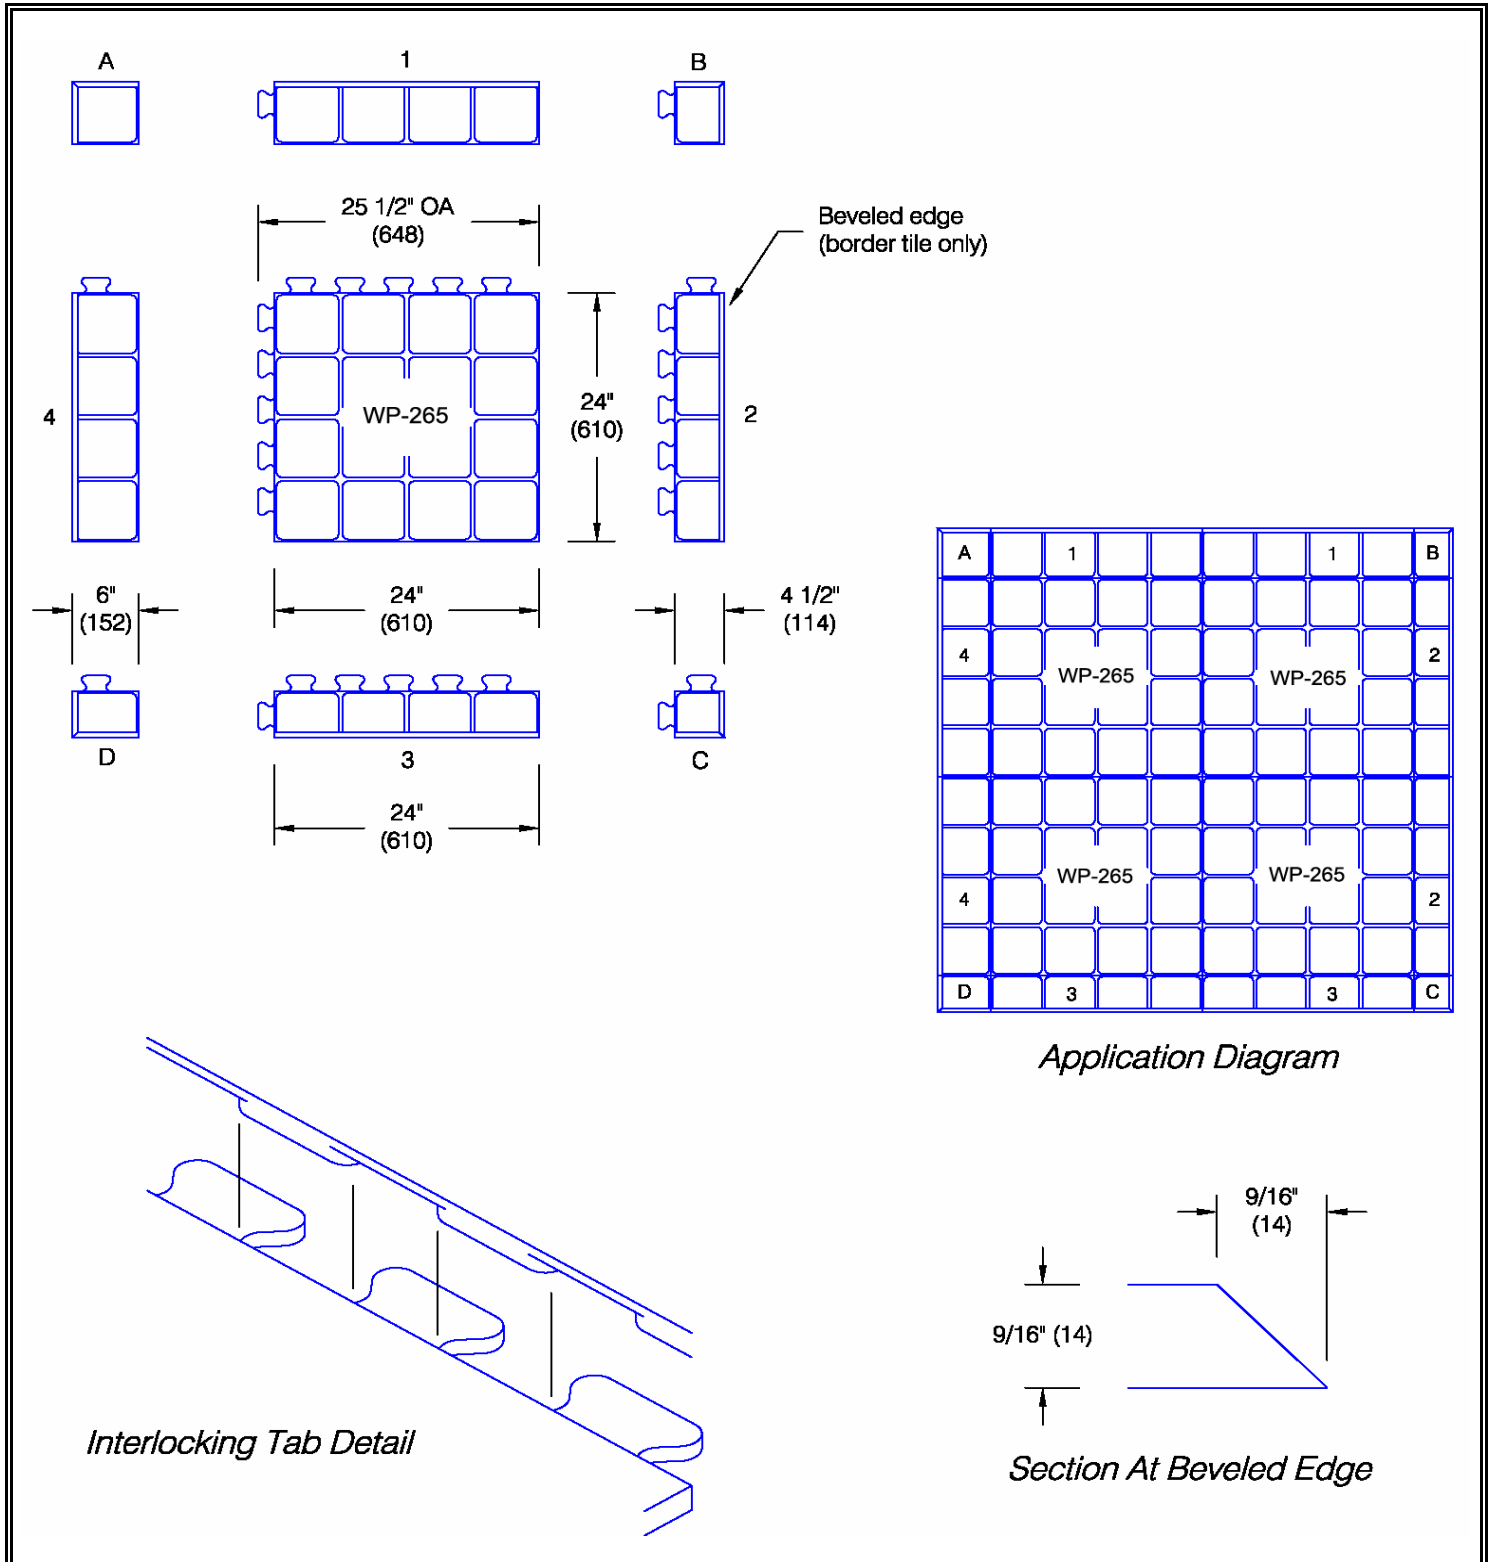

NEWPORT FLOORING® Hidden Interlock (WP-265)

Application	Surface	Free weight area	Material	Coefficient of friction	Flammability
Fitness area Ski lodge	Etched	Standard Heavy-duty	SBR Rubber	ASTM D 2047 Dry: 0.84 Wet: 0.90	NFPA 253 ASTM E 648

Testing in accordance with NFPA 253 (ASTM E 648):
Class II Critical Radiant Flux 0.44 watts/cm²

<p>Features:</p> <ul style="list-style-type: none"> • Hidden Interlocking tabs • No adhesives required • 9/16" (14 mm) thick • Solid color throughout • Manufactured from premium virgin SBR rubber compound • Weight: 16 pounds (7.2 kg), each tile • Tile-to-tile interlocks 	<p>Finishes:</p> <ul style="list-style-type: none"> • Manufacturer's standard colors • Polished smooth finish • Size: 5-5/8" (143 mm) x 5-5/8" (143 mm) raised square pattern
--	---

JOB NAME:	ITEMS		QUANTITY
JOB NUMBER:	Center Tile:		
CONTRACTOR:	Border Tile:	1	
		2	
		3	
		4	
ARCHITECT:	Corner Tile:	A	
DEALER NAME:		B	
		C	
SIGNATURE:		Date:	D
		Color:	