



AMERICAN FLOOR PRODUCTS COMPANY, INC.


AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422

email: sales@afco-usa.com • Web Site: www.afco-usa.com

CUSTOMER P.O. #

WESTPORT® Rubber Flooring (WP-270)

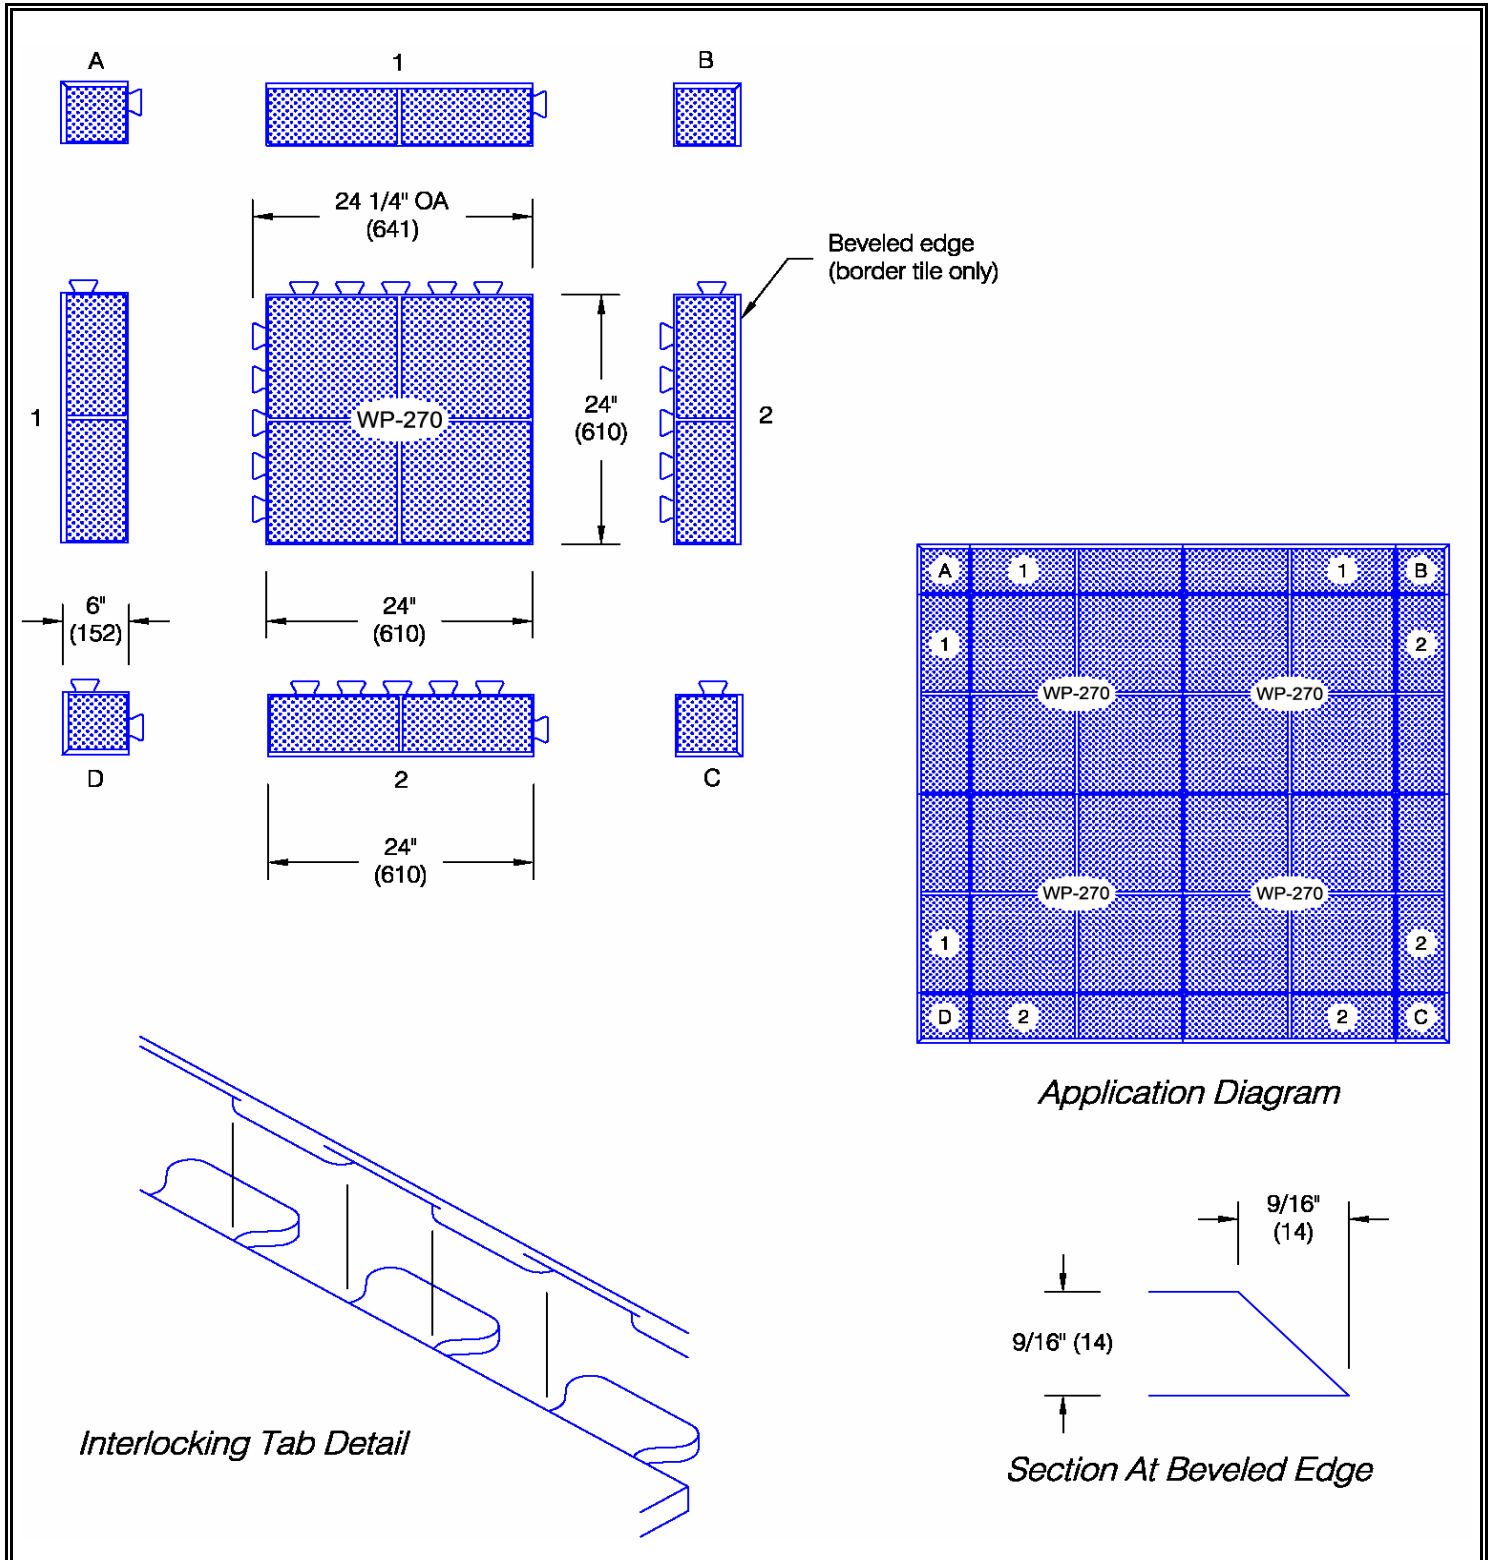

WESTPORT[®] Rubber Flooring (WP-270)

Application	Surface	Free weight area	Material	Coefficient of friction	Flammability
Fitness area Aerobics Dance Multi-purpose	Pebbled	Not recommended	SBR Rubber	ASTM D 2047 Dry: 0.97 Wet: 0.87	NFPA 253 ASTM E 648

Testing in accordance with NFPA 253 (ASTM E 648):
Class II Critical Radiant Flux 0.44 watts/cm²

<p>Features:</p> <ul style="list-style-type: none"> • Hidden interlocking tabs • No adhesives required • 9/16" (14 mm) thick • Solid color throughout • Manufactured from premium virgin SBR rubber compound • Weight: 14 pounds (6.2 kg), each tile • Tile-to-tile interlocking 	<p>Finishes:</p> <ul style="list-style-type: none"> • Manufacturer's standard colors • Size: 11-5/8" (295 mm) x 11-5/8" (295 mm) raised square pattern with nubs for increased traction
--	--

JOB NAME:	ITEMS		QUANTITY
JOB NUMBER:	Center Tile:		
CONTRACTOR:	Border Tile:	1	
		2	
ARCHITECT:	Corner Tile:	A	
		B	
		C	
		D	
DEALER NAME:			
SIGNATURE: _____ Date: _____	Color:		