




AMERICAN FLOOR PRODUCTS COMPANY, INC.

AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422
email: sales@afco-usa.com • Web Site: www.afco-usa.com

CUSTOMER P.O. #

JUNIOR-CHOCK® (WC-2384)

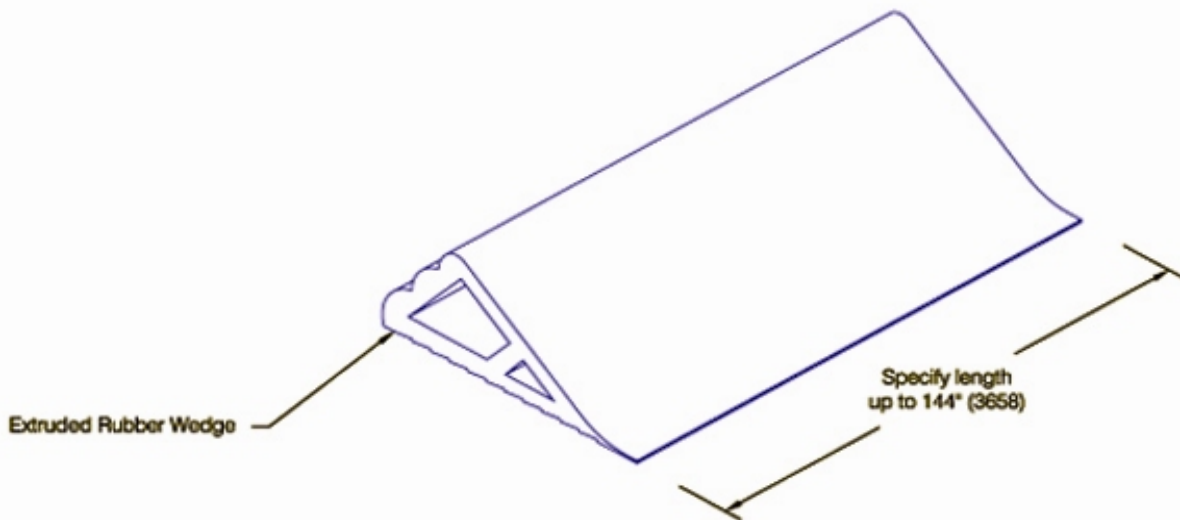

JUNIOR-CHOCK® (WC-2384)

Profile	Application	Shock absorbing	ADA Compliance	Material	Flammability & smoke developed (ASTM E-84)
Sculpted	High abuse	25.4 ft.lbs/in. ASTM D-256	N/A	EPDM Rubber	N/A

<p>Features:</p> <ul style="list-style-type: none"> • Extruded EPDM rubber • Durometer: (ASTM D-412) 70 ± 5 shore A • Standard in 4" (102 mm) and 6" (152 mm) lengths • Custom cutting to 144" (3658 mm) • Designed to promote increased collapsibility for a more effective "wedging" action • Weight: 4.5 lbs./lin. ft. 	<p>Applications:</p> <ul style="list-style-type: none"> • Prevent movement of round/ rolled goods during transport <p>Standard Color: (1)Black</p>
--	---

Bumper designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

JOB NAME:	ITEMS	QUANTITY
JOB NUMBER:	Wheel Chock Length:	
CONTRACTOR:		
ARCHITECT:		
DEALER NAME:		
SIGNATURE: _____	Date: _____	