




AMERICAN FLOOR PRODUCTS COMPANY, INC.

AFco-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422
email: sales@afco-usa.com • Web Site: www.afco-usa.com

CUSTOMER P.O. #

APACHE® Wall Guard (WG-2171)

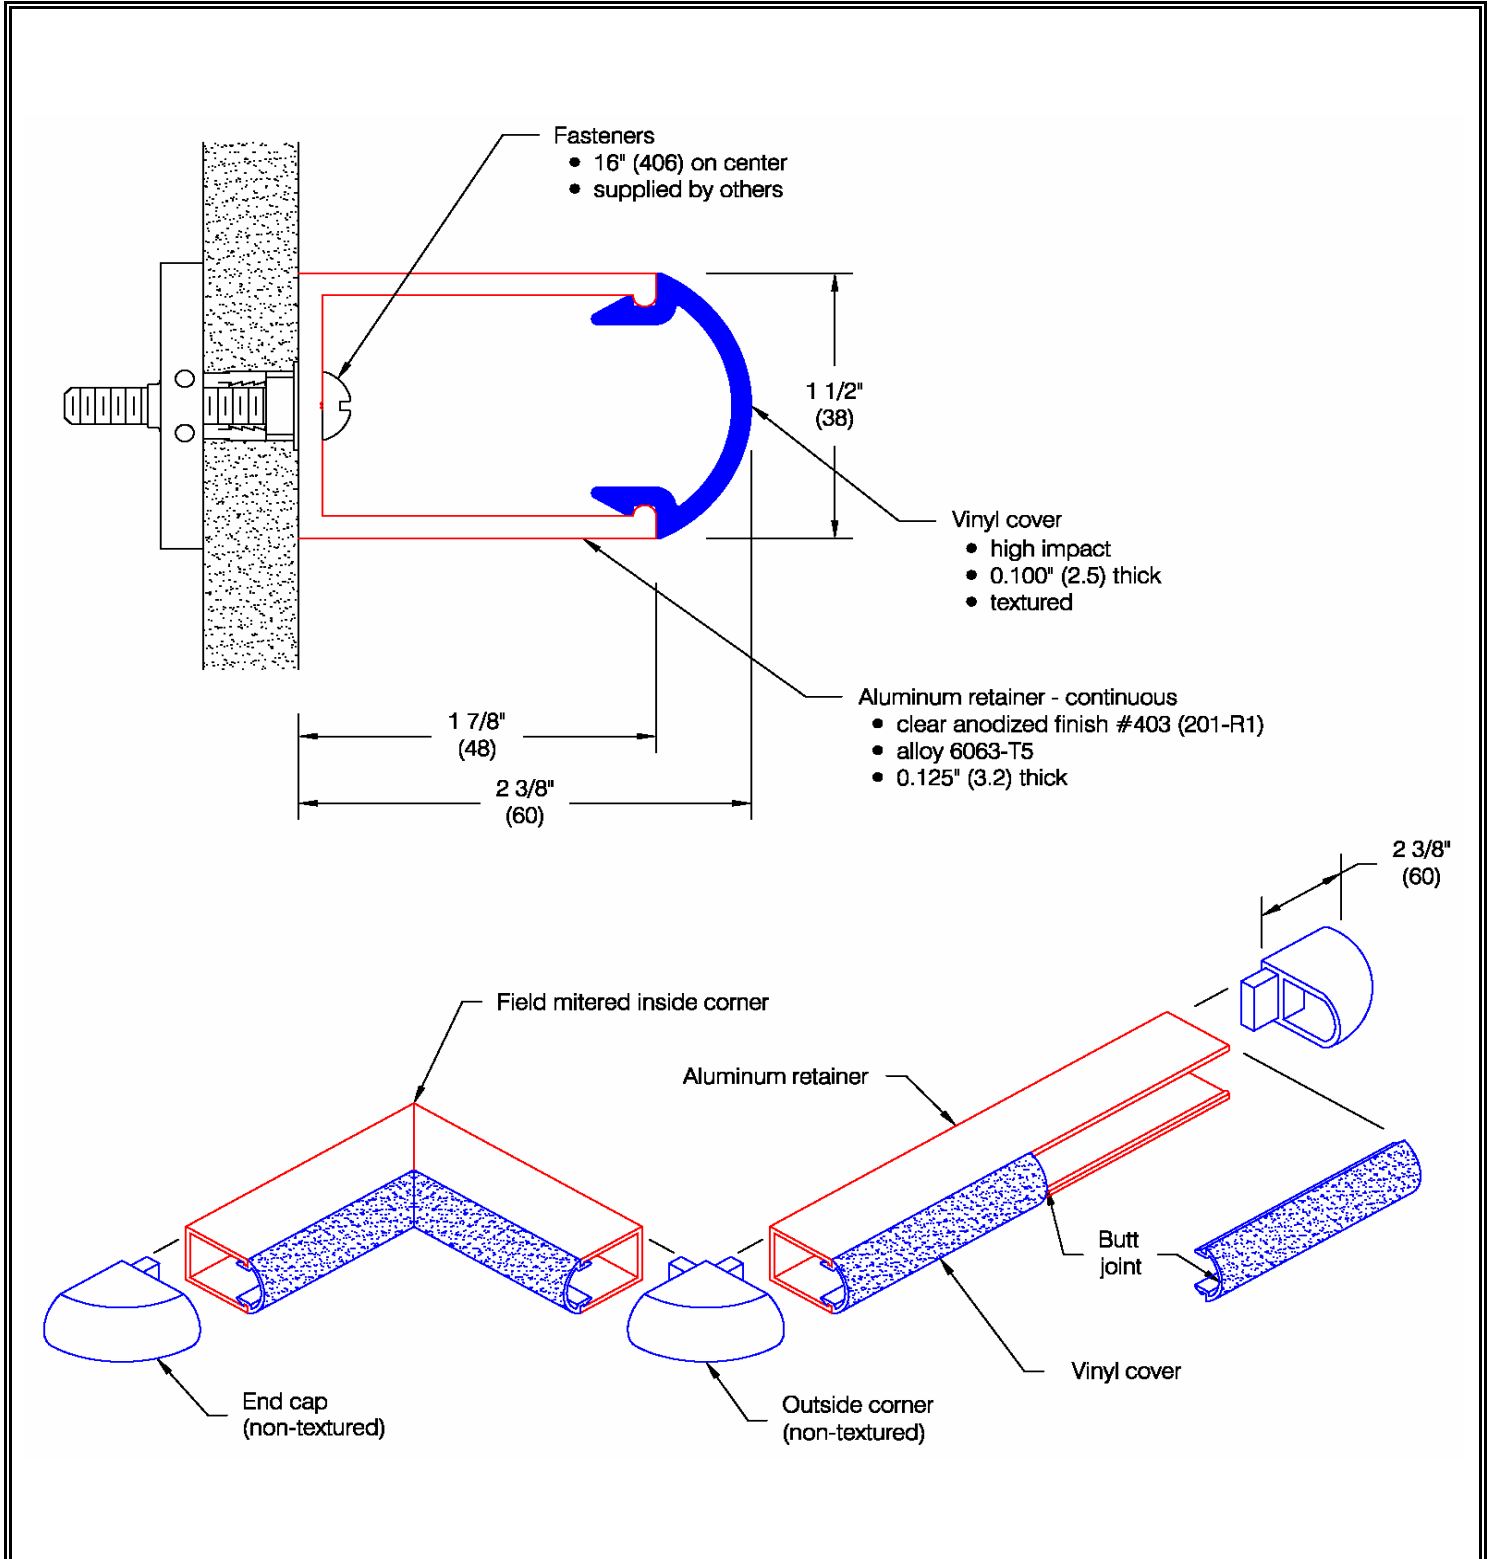

APACHE® Wall Guard (WG-2171)

Profile	Application	Shock absorbing	ADA Compliance	Materials	Flammability & smoke developed (ASTM E-84)
Cylindrical	High abuse Med-high abuse	25.4 ft.lbs/in. ASTM D-256	Yes	Vinyl Aluminum	Class A

Testing in accordance with NFPA 255 (ASTM E 84):

Class A

Flame Spread Index: 5

Smoke Developed Index: 185

<p>Features:</p> <ul style="list-style-type: none"> • Class A fire rating • Matching molded end caps • Matching molded outside corners • Stock length: 12'-0" (3658 mm) • Weight: 0.9 lbs / lin. ft. 	<p>Finishes:</p> <p>Vinyl cover</p> <ul style="list-style-type: none"> • Available in limited standard colors • Custom colors available <p>Retainer</p> <ul style="list-style-type: none"> • Clear anodized aluminum
--	--

Wall Guard designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

	ITEMS	QUANTITY
JOB NAME:		
JOB NUMBER:	Guard Length: 12 ft.	
CONTRACTOR:	Color:	
ARCHITECT:	Right End Cap:	
DEALER NAME:	Left End Cap:	
SIGNATURE: _____ Date: _____	Outside Corner:	